Standby 1100 kVA

APD 1100 M

Mitsubishi

P 732





ISO8528	
SZUTEST	
CE	
2000/14/EC	

50 Hz, 3 Phase, 0,8 PF

	Standby Power		Prime Power		
Voltage	kVA	kw	kVA	kw	Amp
400/230	1100,00	880,00	1030,00	824,00	1488,00

Standby Power: Power available during a variable power sequence which may be utilized up to the time specified whilst operating under the conditions specified in ISO 8528.

Prime Power: Power available during a variable power sequence which may be utilized for an unlimited number of hours per year whilst operating under the conditions specified in ISO 8528, with an overload capability of 10% for 1 hr in 12 hr as per ISO 3046.

Standard Specifications

Equipment

Standby 1100 kVA

APD 1100 M

Mitsubishi

P 732

Двигатель и генератор

Manufacturer		Mitsubishi
Model		S12H-PTA
Мощность двигателя		1500 об./мин. 1020,00 kw [1367,00HP]
Объем двигателя	L	37,110
Диаметр и ход поршня	мм.	150X175
Степень сжатия		14:1
Скорость вращения (об/мин)	об./мин.	1500
Длина двигателя (с.)	L	200,00
Длина двигателя с генератором	L	244,00
AbsorbedAirDischargeReSourceKey.Text	м3/мин.	83,00
Количество воздуха для горения (м3/мин.)	м3/мин.	1800,00
Напряжение аккумулятора		24 V d.c.
Расход топлива	Load л/час.	100% нагрузка 226,00


Генератор

Стандарт		ECO43-1LN/4
Частота	Hz	50
Мощность	кВА.	1100,00
Cos φ		0,80
Количество фаз		3
Напряжение (В)	В	400/230

Габариты и вес

Модель	Длина	Ширина	Высота	Вес	Объем топливного бака
	мм.	мм.	мм.	мм.	L
APD 1100 M	8940,00	4400,00	2100,00	2200,00	1500,00
Модель	Длина	Ширина	Высота	Вес	Объем топливного бака
	мм.	мм.	мм.	мм.	L
AK 96	12590	7500	2300	2495	1500

P 732 - Панель управления

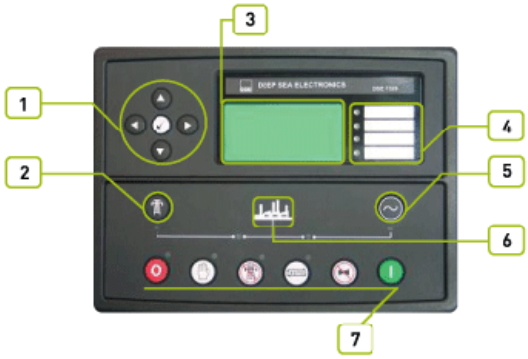

1. Кнопка выбора режима работы
2. Кнопка сброса ошибки
3. Кнопка включения и отключения генератора
4. Индикаторы состояния двигателя
5. Кнопка тестирования индикаторов
6. Индикаторы состояния генератора
7. Кнопка аварийной остановки

[illegible]

"DSE, [illegible] 7320, [illegible] 5A, 220/240 [illegible]"

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible] DSE 7320 [illegible] 220 [illegible]), [illegible] DSE 7320 [illegible] DSE 7320 [illegible]

[illegible]

[illegible]

[illegible] 132 x 64 [illegible], RS232, RS485, [illegible]

Standby 1100 kVA

ȬɊɟɪɚɬɢɜɧɚɹ ɦɨɳɧɨɫɬɶ ɢɡɨɥɹɰɢɢ

APD 1100 M

ȾɜɢɝɚɬɟɥɶMitsubishi

Ɇɨɞɟɥɶɞɜɢɝɚɬɟɥɹ P 732 ɨɛɪɚɛɨɬɤɚ ɞɜɢɝɚɬɟɥɹ

AKSA POWER DIESEL

Ȼɥɨɤ ɭɩɪɚɜɥɟɧɢɹ ɝɟɧɟɪɚɬɨɪɚ

ȾɜɢɝɚɬɟɥɶɆɨɬɨɱɚɫɵ ɪɚɛɨɬɵ
Ⱦɚɜɥɟɧɢɟ ɦɚɫɥɚ
ɍɪɨɜɟɧɶ ɬɨɩɥɢɜɚ ɢ ɬɟɦɩɟɪɚɬɭɪɚ
Ɍɟɦɩɟɪɚɬɭɪɚ ɨɯɥɚɠɞɚɸɳɟɣ ɠɢɞɤɨɫɬɢ
ɇɚɩɪɹɠɟɧɢɟ ɚɤɤɭɦɭɥɹɬɨɪɚ
Ⱦɜɢɝɚɬɟɥɶ
Ƚɟɧɟɪɚɬɨɪ
ɇɚɩɪɹɠɟɧɢɟ (L-L, L-N)
Ɍɨɤ (L1-L2-L3)
ɑɚɫɬɨɬɚ
Ɍɨɤ ɡɚɡɟɦɥɟɧɢɹ
кȼ
ɤȼɬ
кȼȺ ɪ.ɦ.
кȼ.ɦ., кȼȺ.ɦ., кȼȺ ɪ.ɦ.
Ʉɨɷɮɮɢɰɢɟɧɬ ɦɨɳɧɨɫɬɢ
Ɉɛɳɟɟ ɜɪɟɦɹ ɪɚɛɨɬɵ
ɇɚɩɪɹɠɟɧɢɟ (L-L, L-N)
Ɍɚɫɬɚ

Ɂɚɳɢɬɚ ɢ ɡɚɳɢɬɚ

Ⱥɜɚɪɢɣɧɵɣ ɨɫɬɚɧɨɜ
ɇɢɡɤɨɟ
Ⱥɜɚɪɢɣɧɚɹ ɝɚɡɨɜɚɹ ɡɚɳɢɬɚ
ɇɚɪɭɲɟɧɢɟ ɫɢɫɬɟɦɵ ɡɚɩɭɫɤɚ
ɇɢɡɤɢɣ ɭɪɨɜɟɧɶ ɬɨɩɥɢɜɚ
Ʉɨɧɬɚɤɬ
Ɍɟɦɩɟɪɚɬɭɪɚ ɨɯɥɚɠɞɚɸɳɟɣ ɠɢɞɤɨɫɬɢ ɜɵɫɨɤɚɹ
ɄɈɆɆɍɇɂɄȺɐɂɈɇɇɕɃ ɆɈȾɍɅɖ
ɇɢɡɤɢɣ ɭɪɨɜɟɧɶ ɬɨɩɥɢɜɚ
Ⱦɚɜɥɟɧɢɟ ɦɚɫɥɚ ɞɜɢɝɚɬɟɥɹ
ɇɢɡɤɨɟ ɞɚɜɥɟɧɢɟ ɦɚɫɥɚ
ɇɚɪɭɲɟɧɢɟ ɡɚɪɹɞɤɢ / ɡɚɪɹɞɧɨɝɨ ɝɟɧɟɪɚɬɨɪɚ
ɇɟɢɫɩɪɚɜɧɨɫɬɶ ɚɜɚɪɢɣɧɨɝɨ ɨɫɬɚɧɨɜɚ
Ɉɛɳɢɣ ɫɢɝɧɚɥ / ɨɛɳɚɹ ɧɟɢɫɩɪɚɜɧɨɫɬɶ
ECU ɫɢɝɧɚɥ

ȼɈɁɆɈɀɇɈɋɌɂ
ɇɢɡɤɨɟ ɧɚɩɪɹɠɟɧɢɟ
Ⱥɜɚɪɢɣɧɵɣ ɫɬɨɩ
ɇɢɡɤɢɣ ɭɪɨɜɟɧɶ ɬɨɩɥɢɜɚ
Ⱦɚɜɥɟɧɢɟ ɦɚɫɥɚ ɞɜɢɝɚɬɟɥɹ
ɇɢɡɤɚɹ ɬɟɦɩɟɪɚɬɭɪɚ ɠɢɞɤɨɫɬɢ
ɇɚɪɭɲɟɧɢɟ ɡɚɪɹɞɤɢ / ɡɚɪɹɞɧɨɝɨ ɝɟɧɟɪɚɬɨɪɚ
ɇɟɢɫɩɪɚɜɧɨɫɬɶ ɚɜɚɪɢɣɧɨɝɨ ɨɫɬɚɧɨɜɚ
Ɉɛɳɢɣ ɫɢɝɧɚɥ / ɨɛɳɚɹ ɧɟɢɫɩɪɚɜɧɨɫɬɶ
Ɋɟɠɢɦ ɪɚɛɨɬɵ ɜɪɟɦɹ
Ɍɚɣɦɟɪ ɡɚɞɟɪɠɤɢ
ȼɋɋɌɈɌ ɌɈɑɄȺ ɄɈɇɌȺɄɌ
Ɂɚɩɭɫɤ ɧɟ ɭɞɚɥɫɹ
Ʉɨɧɬɚɤɬ
Ƚɟɧɟɪɚɬɨɪ ɜɵɫɨɤɨɟ ɧɚɩɪɹɠɟɧɢɟ

Ʉɚɱɟɫɬɜɨ ɢɡɞɟɥɢɹ

Ⱦɢɡɟɥɶɧɵɣ ɞɜɢɝɚɬɟɥɶ ɫɨ ɫɬɚɧɞɚɪɬɧɵɦ ɝɟɧɟɪɚɬɨɪɨɦ
Ⱦɢɡɟɥɶɧɵɣ ɞɜɢɝɚɬɟɥɶ ɫ ɛɟɡɳɟɬɨɱɧɵɦ ɝɟɧɟɪɚɬɨɪɨɦ
Ʉɚɱɟɫɬɜɨ ɫɟɪɬɢɮɢɤɚɰɢɢ ISO ɢ ɢɧɫɩɟɤɰɢɢ
Ʉɚɱɟɫɬɜɨ ɜɵɫɨɤɨɝɨ ɭɪɨɜɧɹ ɢ ɫɟɪɬɢɮɢɤɚɬɵ
ɇɄɈɆɈ ɌȺɆɈɌɈɇɈɋ
Ɉɛɳɢɟ ɫɬɚɧɞɚɪɬɵ ɤɚɱɟɫɬɜɚ (2548)
ɫɢɫɬɟɦɚ ɡɚɳɢɬɵ (2157)
ɇɨɪɦɵ ɢɡɥɭɱɟɧɢɹ ɲɭɦɚ (2130)

Ɋɟɠɢɦ

Ȼɟɡɨɩɚɫɧɨɫɬɶ ɜɵɫɨɤɨɜɨɥɶɬɧɨɝɨ / ɷɥɟɤɬɪɨɦɚɝɧɢɬɧɚɹ
ɫɨɜɦɟɫɬɢɦɨɫɬɶ
BS EN 60950 ɷɥɟɤɬɪɢɱɟɫɤɚɹ ɛɟɡɨɩɚɫɧɨɫɬɶ
ɨɛɨɪɭɞɨɜɚɧɢɹ
BS EN 61000-6-2 ɷɥɟɤɬɪɨɦɚɝɧɢɬɧɚɹ
ɫɨɜɦɟɫɬɢɦɨɫɬɶ.ɩɨɦɟɯɨɭɫɬɨɣɱɢɜɨɫɬɶ
BS EN 61000-6-4 ЭМС ɢɡɥɭɱɟɧɢɟ ɞɥɹ ɩɪɨɦɵɲɥɟɧɧɵɯ
ɡɨɧ ɢ ɬɨɪɝɨɜɵɯ ɫɪɟɞ

ɇɚɩɪɹɠɟɧɢɟ ɢ ɡɚɪɹɞɧɨɟ ɭɫɬɪɨɣɫɬɜɨ

Ⱥɜɚɪɢɣɧɚɹ ɡɚɪɹɞɤɚ ɚɤɤɭɦɭɥɹɬɨɪɚ ɫ ɢɫɩɨɥɶɡɨɜɚɧɢɟɦ ɬɟɯɧɨɥɨɝɢɢ SMD ɜɤɥɸɱɚɟɬɫɹ ɚɜɬɨɦɚɬɢɱɟɫɤɢ. ɇɚɩɪɹɠɟɧɢɟ ɡɚɪɹɞɤɢ ɫɨɫɬɚɜɥɹɟɬ 5 Ⱥɦɩɟɪ, ɚ ɦɚɤɫɢɦɚɥɶɧɨɟ ɧɚɩɪɹɠɟɧɢɟ - 27.6 ɜɨɥɶɬ. Ɋɚɛɨɱɟɟ ɞɢɚɩɚɡɨɧ ɞɜɢɝɚɬɟɥɹ 198-264 ɜɨɥɶɬ. Ⱥɜɚɪɢɣɧɚɹ 2405 ɡɚɳɢɳɟɧɨ, ɩɨɫɬɨɹɧɧɨ ɫɨɯɪɚɧɹɟɬ ɩɨɥɧɭɸ ɡɚɪɹɞɤɭ, ɩɪɟɞɨɬɜɪɚɳɚɹ ɩɨɜɪɟɠɞɟɧɢɟ ɚɤɤɭɦɭɥɹɬɨɪɚ. Ʉɨɪɩɭɫ ɢɡ ɚɥɸɦɢɧɢɹ ɢ ɡɚɳɢɬɚ ɨɬ ɜɥɚɠɧɨɫɬɢ ɢ ɜɢɛɪɚɰɢɢ ɨɛɟɫɩɟɱɢɜɚɟɬ. Ɉɛɳɢɣ ɜɟɫ ɩɪɢɛɨɪɚ ɢ ɧɚɞɟɠɧɨɫɬɶ.

Standby 1100 kVA


APD 1100 M

Mitsubishi

P 732

AKSA POWER DIESEL

AK 96 - Rear

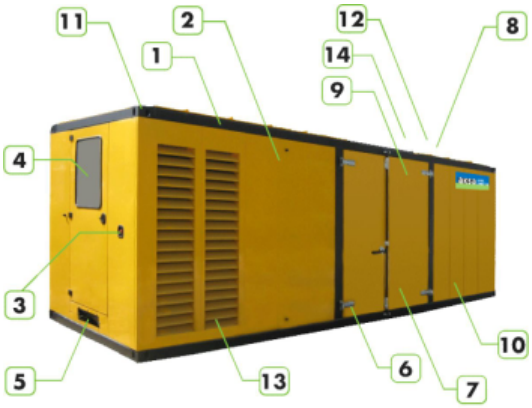

1. Steel structure made from steel sheet and steel profiles.
2. canopy and panels made from powder coated sheet steel.
3. Emergency stop push button.
4. Control panel is mounted on the baseframe . Located at the back of the generator set
5. Cables out locations are under or back of the canopy.
6. Corrosion-resistant locks and hinges.
7. oil could be drained via valve and a hose
8. Exhaust system in the canopy.
9. special large access doors for easy maintanance
10. Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
11. Lifting points similar to ISO container , located on each top corner of the canopy
12. the cap on the canopy provides easy accsess to radiator cap.
13. sound proofing materials
14. Integrated ladder built in to side of the canopy allows access to the top of the canopy

Standard

Aksa Power Generation Sanayi A.Ş. is ISO 9001:2000/EC certified company.

Length	mm.	2300
Width	mm.	7500
Height	mm.	2495
Dry weight	L	1500

Источник: ГК ЭнергоПроф Тел. 8 (800) 555-06-29